




Innovation Lift
SCANDINAVIA AB

We can We do and We do it smarter!

ILS 1K

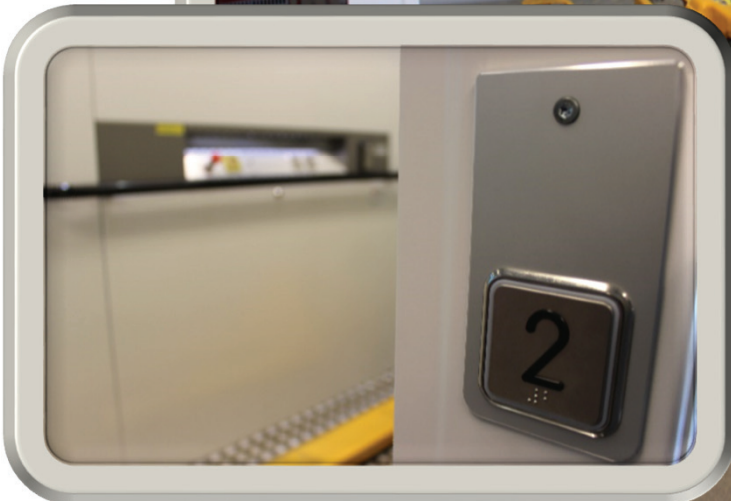



ILS 1K take flexibility to a new level.

ILS 1K is by the first look a normal platform lift, even if we are really proud of the design. What differs us from others is our innovative solutions, and just to mention some things this give:

- ◆ 55 different platform sizes to choose from and a shaft pit of only 110mm, this means that we always have a lift that fits your building.
- ◆ A full height platform back, which isn't just good looking, it gives you correct lighting during your ride, and you can have a mirror as an option.
- ◆ A fantastic design and construction for an easy and quick installation, plug n' play all the way through.
- ◆ Competitive material prices and short installation times, do that ILS 1K probably have the best price on the market.

Thanks to our great design, our strong construction and our flexibility, ILS 1K fit into all environments, both public and industrial, and just to mention some examples: hospitals, care homes, arenas, schools, offices, workshops, furniture stores, yes, everywhere where design, surface and lifting capacity is a demand.

ILS 1K always have 1300mm wide and fully glazed doors as standard when you choose a platform that is 1400mm wide. This gives you fantastic loading opportunities. As an option you can of course choose fire rated EI60 doors. All our pushbuttons have both tactile and braille.

Other possible options: phones, different choices of flooring, locking, voice announcement, automatic door openers, level indicators, arrival bell, glazed shaft panels, lift painted in other RAL colours, elbow buttons and mirror. Just to mention some options.

A lift from Innovation Lift Scandinavia AB gives you an easy and smooth life, and we are convinced that you will not regret your choice of lift.

Recommended installation	Indoors
Rated load	1000 kg
Rated Speed	max 0,15 m/sec
Height limits	max travel height 13m top Height 2,3 mm
Pit depth	110 mm
Stops	5 stops
Standard platform sizes (w x d)	1400 x 2000 / 1400 x 2500 / 1100 x 2200
Standard lift dimensions (w x d)	1830 x 2080 / 1400 x 2580 / 1530 x 2280 *, **
Cut-out size	+ 30 mm on above
Other platform dimensions width	1000 - 1400
Lift dimension (w)	+ 430 mm (+460 mm if door on B-side)
Other platform dimensions depth	1500 - 2500
Lift dimension (d)	+ 80 mm (if door on A & C +110mm)
Cut-out size	+ 30mm
Standard Shaft finish	Laminated sandwich panels in RAL 9003 (white) (T=25mm, H=565mm), Glazed panels optional.
Standard platform finish	RAL 9003 (white) All powder coated, other RAL colours available upon request, black rubber flooring.
Doors	Swing doors, doors can be on 3 sides
Drive system	Screw and nut
Control system	PLC
Power supply	380-400V 3-phase 50/60 Hz 16A, frequency converter
Motor	4 kW
Battery emergency lowering	incl. as standard
Door buttons	one touch
Platform buttons	Hold to run All buttons with tactile and braille
Certification	MD 2006 / 42 / EC
Manufactured in	Sweden

* If door on side A & C=+30mm

** If door on side B, w=+30mm